




Datasheet

Smart extensible Vision Processing Unit



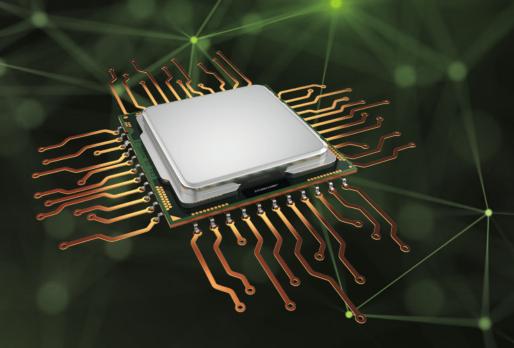













# The Intelligent Solution for Industrial Vehicle Technology

SXVPU is an Al-powered imaging platform designed to tackle challenges like object recognition and machine learning integration through its efficient real-time processing of high-resolution video streams up to 4K.

With its specialized AMDbased hardware architecture and support for multiple cameras and sensors, SXVPU is set up to use impeccable image data straight from the sensor for processing by neural networks or conventional algorithms before encoding the data for transmission via Ethernet.

The result is a perfect solution for viewing and vision applications in mobile automation.







#### Application Examples:

+ Automation

+ Monitoring of construction sites

- + Collision avoidance systems
- + Machine control

## Modular Approach for Ample Flexibility



#### System Performance

- + High computing power and efficiency of up to 10 TOPS per watt
- + H.264 / H.265 codec for up to 4K video streaming
- + Low latency for real-time processing of video streams
- + 24/7 safeguarded operation



#### Expandable SW + Intelligent Apps

- + Seamless integration of neural networks and machine learning models
- + Fast and efficient development with Linux® OS
- + Tailored processing for industrial vehicle applications
- + Support for common frameworks & industry standards



#### Customizable HW

- + Flexibility on all interfaces for various environments
- + Scalable processing and versatile hardware acceleration
- + Easy configuration and simplified system integration
- + Housing with IP65 protection (IP67 optional)



#### Optional Bird Eye View Application

- + Gives an overview of a vehicle's surroundings
- + Object detection algorithms
- + Blending of image data from multiple sources
- + Supports up to 8 cameras

### Available Models

#### SXVPU AI Model

An Al-accelerated model that offers seamless integration of neural networks for Al vision applications.



### SXVPU Wi-Fi Model 🤝



A wireless system variant for use within a Wi-Fi network that meets the need for isolated operation.



### SXVPU 5G Model 🤝




An SXVPU model designed for 5G data networks.



### SXVPU Custom Model

A special design perfectly suited for your application.

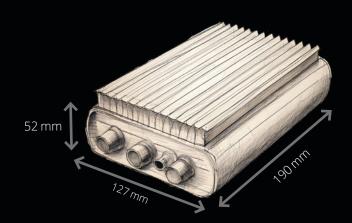

### SXVPU Use Case Examples

















# **Technical Data**



Al Accelerator (in SXVPU Al Model)  CPU  Quad-core Arm® Cortex®-A53 MPCore™ up to 1.5 GHz  GPU  Mali™-400 MP2 up to 667 MHz  Chipset  SoC integrated  Trusted Platform Module (TPM)  Infineon 2.0, Security TPM2.0 supporting IEC62443  System Memory  DDR4 4 GB onboard 64-bit  Storage  eMMC 16 GB, 64 MB QSPI FLASH  Expansion  M.2 Key M, 22 mm × 42 mm (PCle Gen2 x4)  Construction  Protection Class  Universal aluminium profile enclosure Pressure compensation element  Protection Class  IP65 (IP67 optional)  Operating Temperature  -40 °C to +75 °C (65 °C w/ max. performance, 85 °C w/ min. performance)  Weight (net/gross)  1.2 kg (2.65 lb) / 1.5 kg (3.31 lb)  OS Support  PetaLinux  Wall brackets	Specifications	
GPU Mali™-400 MP2 up to 667 MHz  Chipset SoC integrated  Trusted Platform Module (TPM) Infineon 2.0, Security TPM2.0 supporting IEC62443  System Memory DDR4 4 GB onboard 64-bit  Storage eMMC 16 GB, 64 MB QSPI FLASH  Expansion M.2 Key M, 22 mm × 42 mm (PCle Gen2 x4)  Construction Protection Class IP65 (IP67 optional)  Operating Temperature −40 °C to +75 °C (65 °C w/ max. performance, 85 °C w/ min. performance)  Weight (net/gross) 1.2 kg (2.65 lb) / 1.5 kg (3.31 lb)  OS Support PetaLinux	Al Accelerator (in SXVPU Al Model)	26 TOPS
Chipset SoC integrated  Trusted Platform Module (TPM) Infineon 2.0, Security TPM2.0 supporting IEC62443  System Memory DDR4 4 GB onboard 64-bit  Storage eMMC 16 GB, 64 MB QSPI FLASH  Expansion M.2 Key M, 22 mm × 42 mm (PCle Gen2 x4)  Construction Universal aluminium profile enclosure Pressure compensation element  Protection Class IP65 (IP67 optional)  Operating Temperature -40 °C to +75 °C (65 °C w/ max. performance, 85 °C w/ min. performance)  Weight (net/gross) 1.2 kg (2.65 lb) / 1.5 kg (3.31 lb)  OS Support PetaLinux	CPU	Quad-core Arm® Cortex®-A53 MPCore™ up to 1.5 GHz
Trusted Platform Module (TPM)  Infineon 2.0, Security TPM2.0 supporting IEC62443  System Memory  DDR4 4 GB onboard 64-bit  Storage  eMMC 16 GB, 64 MB QSPI FLASH  Expansion  M.2 Key M, 22 mm × 42 mm (PCle Gen2 x4)  Construction  Universal aluminium profile enclosure Pressure compensation element  Protection Class  IP65 (IP67 optional)  Operating Temperature  -40 °C to +75 °C (65 °C w/ max. performance, 85 °C w/ min. performance)  Weight (net/gross)  1.2 kg (2.65 lb) / 1.5 kg (3.31 lb)  OS Support	GPU	Mali™-400 MP2 up to 667 MHz
System Memory  DDR4 4 GB onboard 64-bit  Storage  eMMC 16 GB, 64 MB QSPI FLASH  Expansion  M.2 Key M, 22 mm × 42 mm (PCle Gen2 x4)  Universal aluminium profile enclosure Pressure compensation element  Protection Class  IP65 (IP67 optional)  Operating Temperature  -40 °C to +75 °C (65 °C w/ max. performance, 85 °C w/ min. performance)  Weight (net/gross)  1.2 kg (2.65 lb) / 1.5 kg (3.31 lb)  OS Support  PetaLinux	Chipset	SoC integrated
Storage eMMC 16 GB, 64 MB QSPI FLASH  Expansion M.2 Key M, 22 mm × 42 mm (PCle Gen2 x4)  Construction Universal aluminium profile enclosure Pressure compensation element  Protection Class IP65 (IP67 optional)  Operating Temperature -40 °C to +75 °C (65 °C w/ max. performance, 85 °C w/ min. performance)  Weight (net/gross) 1.2 kg (2.65 lb) / 1.5 kg (3.31 lb)  OS Support PetaLinux	Trusted Platform Module (TPM)	Infineon 2.0, Security TPM2.0 supporting IEC62443
Expansion M.2 Key M, 22 mm × 42 mm (PCle Gen2 x4)  Construction Universal aluminium profile enclosure Pressure compensation element  Protection Class IP65 (IP67 optional)  Operating Temperature -40 °C to +75 °C (65 °C w/ max. performance, 85 °C w/ min. performance)  Weight (net/gross) 1.2 kg (2.65 lb) / 1.5 kg (3.31 lb)  OS Support PetaLinux	System Memory	DDR4 4 GB onboard 64-bit
Construction  Universal aluminium profile enclosure Pressure compensation element  Protection Class  IP65 (IP67 optional)  Operating Temperature  -40 °C to +75 °C (65 °C w/ max. performance, 85 °C w/ min. performance)  Weight (net/gross)  1.2 kg (2.65 lb) / 1.5 kg (3.31 lb)  OS Support  PetaLinux	Storage	eMMC 16 GB, 64 MB QSPI FLASH
Pressure compensation element  Protection Class  IP65 (IP67 optional)  Operating Temperature  -40 °C to +75 °C (65 °C w/ max. performance, 85 °C w/ min. performance)  Weight (net/gross)  1.2 kg (2.65 lb) / 1.5 kg (3.31 lb)  OS Support  PetaLinux	Expansion	M.2 Key M, 22 mm × 42 mm (PCle Gen2 x4)
Operating Temperature -40 °C to +75 °C (65 °C w/ max. performance, 85 °C w/ min. performance)  Weight (net/gross) 1.2 kg (2.65 lb) / 1.5 kg (3.31 lb)  OS Support PetaLinux	Construction	
Weight (net/gross)         1.2 kg (2.65 lb) / 1.5 kg (3.31 lb)           OS Support         PetaLinux	Protection Class	IP65 (IP67 optional)
OS Support PetaLinux	Operating Temperature	-40 °C to +75 °C (65 °C w/ max. performance, 85 °C w/ min. performance)
**	Weight (net/gross)	1.2 kg (2.65 lb) / 1.5 kg (3.31 lb)
Mounting Wall brackets	OS Support	PetaLinux
Wall blackets	Mounting	Wall brackets

www.solectrix.de + www.sxvpu.de



Front Interfaces	
Camera Input	4× GMSL2 via SMA connectors (FAKRA connectors optional)
Ethernet/PoE	1× 10/100/1000 Mbps Ethernet with hardware timestamping (IEEE 1588)
Digital I/O	1× CAN 2.0 1× General Purpose Input 12 V / 24 V 1× Status LED (RGB)
Power Supply	9 to 36 VDC + 1× Power Enable Input



Rear Interfaces (during development phase only)	
Display	1× HDMI 1.4/2.0 via Mini-DisplayPort Connector (DP++)
USB	2× USB 3.2 Gen1
Expansion	1× OCuLink 2 (PCle Gen3 x4)
Debug	1× Debug USB with 3× UART + JTAG
Power Supply	1× Battery Socket
Memory	1× MicroSD Card Slot

#### For Quick Results: The SXVPU Dev Kit

#### Contents:

- + SXVPU
- + 4x HDR camera
  - + IP69k protection
  - + 3 MPix at 60 fps
  - + Lens FOV H 118°
  - + 2 m cable
- + Ethernet cable
- + Power supply unit with cable
- + Rugged carrying case



#### solectrix GmbH

Dieter-Streng-Str. 4 90766 Fürth Germany

+49 (0) 911–30 91 61–0 automotive@solectrix.de

### Al Development Support

- + Al model design
- + Application development
- + System implementation



Customer Contributions

Solectrix Contributions